

Easily adjusts sprinklers to proper height and position, and eliminates broken risers



1/2" Threaded x 6" Length Retrofit



1/2" Threaded x 6" Length Standard



1/2" Threaded x 12" Length



1/2" x 3/4" Threaded x 12" Length



3/4" Threaded x 12" Length

Have you experienced trouble installing sprinklers to the correct finish grade because you can't find the right riser length? When existing pipes are buried in shallow trenches and you want to retrofit to taller pop-up sprinklers, what can you turn to? Are you having difficulty raising sprinklers that are buried under inches of built-up thatch? Do you want to be sure that

when a sprinkler has heavy equipment rolling over the top it can be easily readjusted to the correct grade? Presenting the perfect solution—the Hunter SJ Swing Joint. It's the way to easily install sprinklers to their proper height and position in mere seconds. This is an innovative product you won't want to pass up!

Features & Benefits



Two convenient sizes

6" or 12" long for easy use

Heavy-duty flexible poly tubing

Bends at sharp angles without flow disruption

Heavy-duty construction

Pressure rated to 150 PSI

For use with sprays or rotors

Both models available with 1/2" or 3/4" male fittings



The 1/2" elbow accommodates PS, SRS, Pro-Spray®, Institutional Spray and all other spray heads.




The 3/4" elbow is designed for use with PGP®, I-20 Ultra and any other 3/4" gear driven rotor.




Existing systems with horizontally-oriented fittings can take advantage of the swing joint's benefits with the retrofit model.

Swing Joint Friction Loss



Swing Joint Friction Loss – Metric

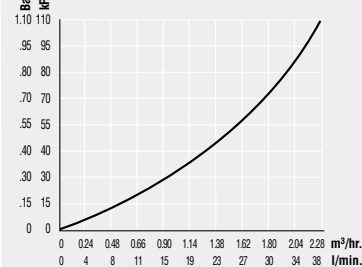

Models

- SJ-506 – 1/2" threaded x 6" (15 cm) length standard
- SJ-506-R – 1/2" threaded x 6" (15 cm) length retrofit
- SJ-512 – 1/2" threaded x 12" (30 cm) length
- SJ-7512 – 1/2" x 3/4" threaded x 12" (30 cm) length
- SJ-712 – 3/4" threaded x 12" (30 cm) length

General Features

- Standard configuration has swivel ells on both ends for maximum versatility
- Retrofit version has a 13/16" (21 mm) hex nut for easy threading into horizontally oriented fittings
- Unique patented swivel ells can be installed to virtually any configuration, leak free